


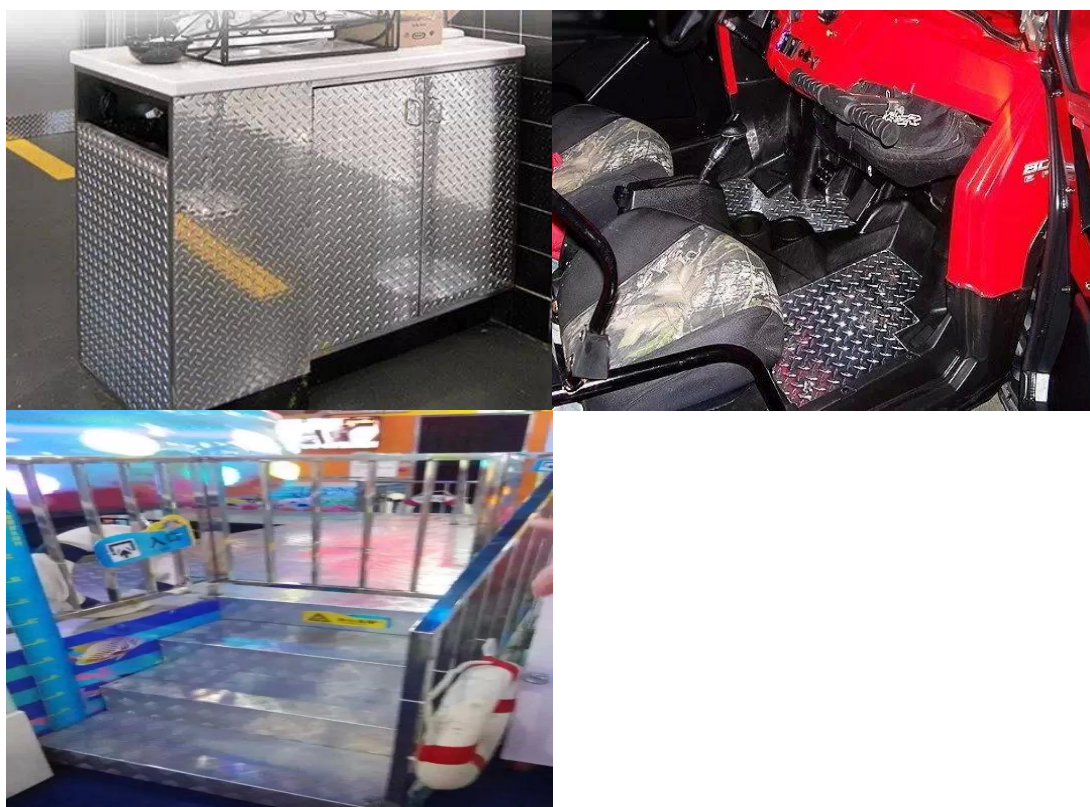

5


`□□ &□□;□□`

MOQ	3
箱数	2500箱/

品名	A4品名
規格	品名
単位	T / T30品名
数量	品名25-35
備考	品名 品名 品名20 GP品名18 品名40GP品名22





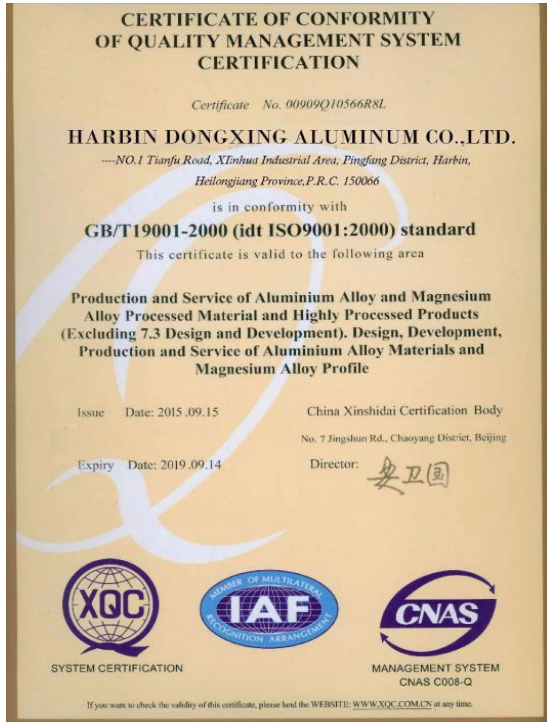

TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 1 of 2

CUSTOMER NAME: HARBIN DONGXING ALUMINUM CO., LTD
ADDRESS: NO.1 TIANFU ROAD, XINHUA INDUSTRIAL AREA, PINGFANG
DISTRICT, HARBIN, CHINA 150066

The following sample(s) was/ were submitted and identified on behalf of the client as:

Sample Name : 5052 ALLOY IN 3MM THICKNESS

SGS Ref. No. : GZIN1603012563PC

Date of Receipt : Mar 30, 2016

Testing Start Date : Mar 30, 2016

Testing End Date : Apr 05, 2016

Test result(s) : For further details, please refer to the following page(s)

Signed for
SGS-CSTC Standards Technical
Services Co., Ltd. GZ Branch Testing
Center

Center
CIP

Shining Chan
Authorized signatory



This document is issued by the Company subject to the General Conditions of Service printed overleaf, available on request or electronically at www.singaporeair.com/GeneralConditions and, for avoidance of formal documents, subject to the Terms and Conditions for Documents at www.singaporeair.com/TermsandConditions. Information is drawn to the limitation of liability, which is set out in the General Conditions of Service, and the Terms and Conditions for Documents, and the Company's liability in the event of an accident or other incident, which is set out in the General Conditions of Service, and the Terms and Conditions for Documents. This document cannot be reproduced or used in full, without prior written permission of the Company. Any unauthorized reproduction or use of this document is strictly prohibited. The Company does not warrant the accuracy or completeness of the information contained herein. The Company does not warrant the accuracy or completeness of the information contained herein. The Company does not warrant the accuracy or completeness of the information contained herein.



TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 2 of 2

Tensile Test:

Test Method: ASTM B209-14 & ASTM A370-15

Test method: ASTM B209-14 & ASTM A370-15					
Test item	Specimen type	Tensile strength, S _t (ksi)	Yield strength, YS(0.2% offset) (ksi)	Elongation after fracture, G _{a2in} (%)	Con.
ASTM B209-14 5052 H32 Req.	-	31.0-38.0 (0.114<= <= 0.249)	>=23.0 (0.114<= <= 0.249)	>=9 (0.114<= <= 0.249)	-
Result	Rectangular noncylindrical	31.6	23.3	14	Pass

Note: 1. t is sample thickness, in.

2. The results comply with the requirement of ASTM B209-14 type 5052 H32

Original Sample Photo:



***** End of report*****

[illegible]

Contact Us



Amber Zheng

- Position: Sales Manager
- Tel: 0086-0451-87105377 0086-13766825059
- Email: amber@aludongxing.com
- SKYPE: [amberamber796](https://www.skype.com/people/amberamber796)
- Trademanager: [cnaludongxing](https://www.trademanager.com/cnaludongxing)
- QQ: 2851851713