


Produit La description

spécification


Produit prénom	Aluminium PE enduit bobine fabricant fabricant Chine
Matériel	Série 1000/3000/5000
Tempérer	H114
Épaisseur	0,8-10 mm
Largeur	100-2400 mm
Longueur	moins de 12000 mm
Surface	Être exempt de tache d'huile, de dent, d'inclusion, d'éraflures, de taches, de décoloration d'oxyde, de ruptures, de corrosion, de marques de roulement, de traînées de saleté et d'autres défauts qui interféreront avec l'utilisation.
MOQ	5 tonnes
la norme	GB / T 3880-2006, Q / Q 141-2004, ASTM, JIS, EN
Certification	ISO9001, SGS, ROHS, FDA, TUV

Des produits Montrer

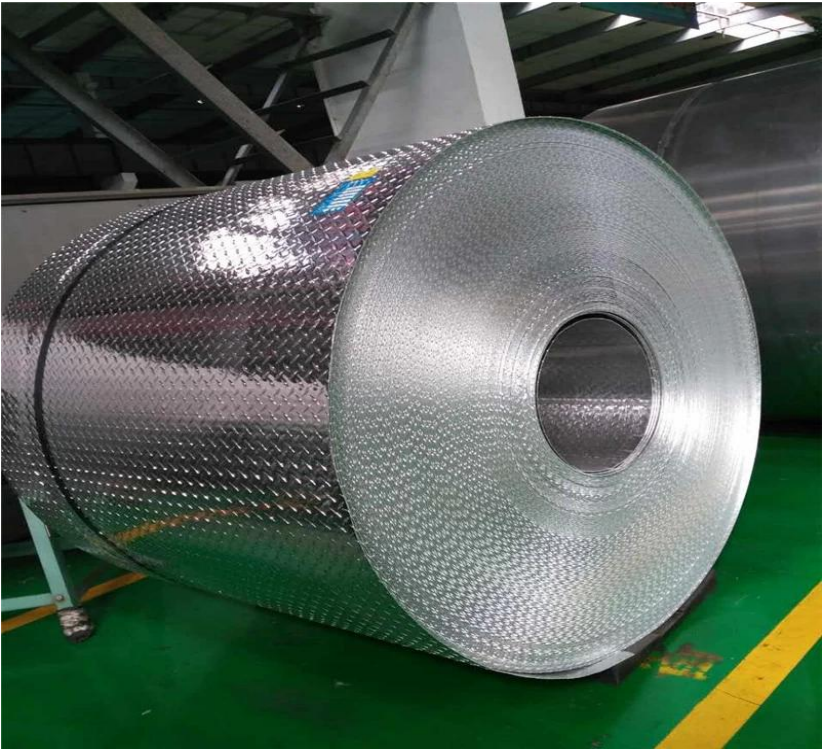



Application

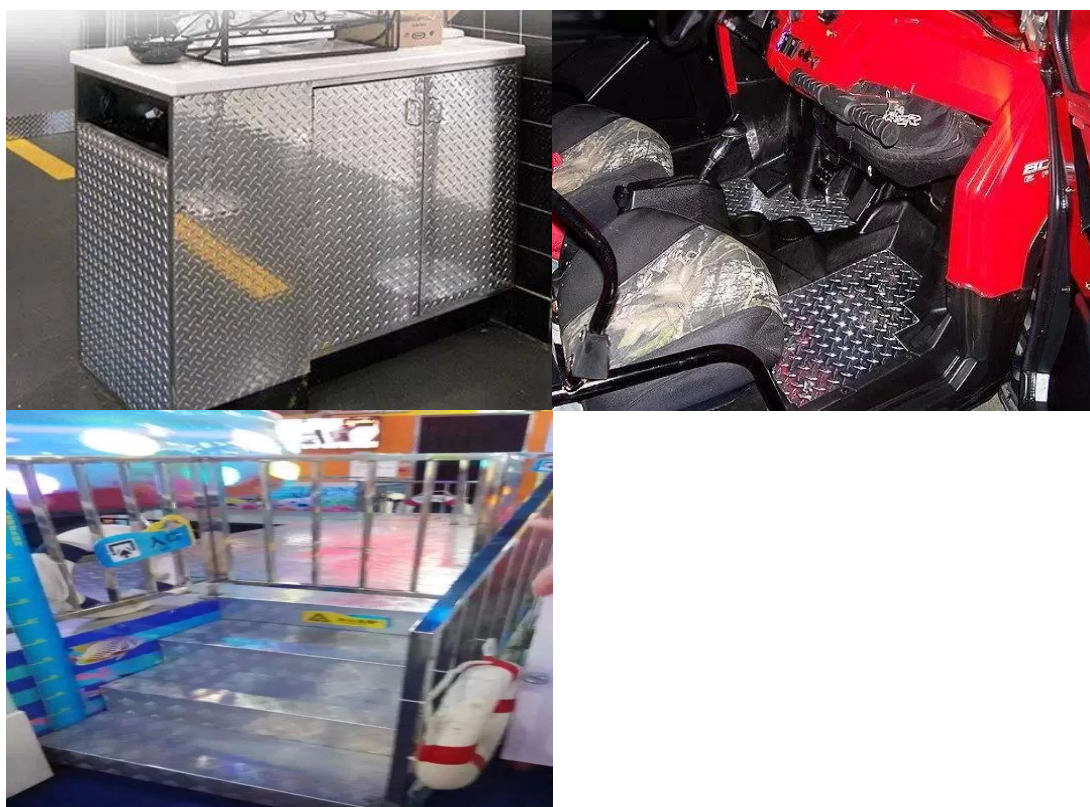

5 barres de diamant aluminium à carreaux sont largement utilisés dans l'éclairage, film réfléchissant solaire, l'apparence du bâtiment, décoration intérieure, plafond, mur, meubles, armoires, ascenseur, décoration intérieure de voiture, appareils ménagers, réfrigérateurs, fours à micro-ondes, équipement audio, Aérospatiale, militaire, chimique / isolation thermique revêtement de pipeline.

Emballage & Livraison

MOQ	3 tonnes
Produire la capacité	2500 tonnes / mois
Charge de l'échantillon	Échantillon de format de papier A4 gratuitement, vous avez seulement besoin de payer le fret
Fabrication d'échantillons	Environ une semaine après que nous obtenons les frais
Article de paiement	T / T, 30% de prépaiement, solde avant l'expédition. Irrévocable L / C à vue
Heure de livraison	25-35 jours après réception du prépaiement
Détails de l'emballage	Paquet d'exportation standard. Palette horizontale et verticale. Un conteneur de 20 GP peut charger environ 18 tonnes Un conteneur de 40 GP peut charger environ 22 tonnes





À propos de nous

Profil de la société

Harbin Dongxing Aluminium Co., Ltd

Bienvenue à Harbin Dongxing Aluminium Co., Ltd, un important fabricant chinois de produits en aluminium. Nous sommes établis en l'an 2000, situé dans la belle ville de Harbin. Notre usine est un fournisseur compétent et fiable dans la feuille d'aluminium simple et enduite, la bobine, la feuille, et d'autres produits en aluminium en Chine.




Équipement de traitement





Notre Certifications

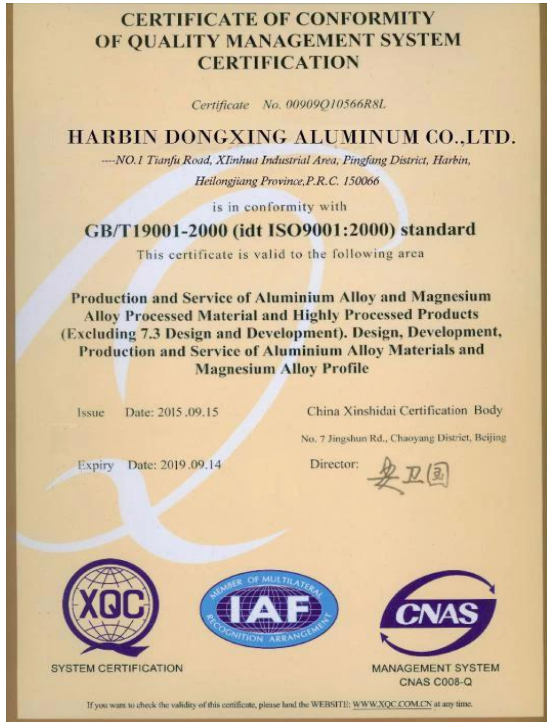



TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 1 of 2

CUSTOMER NAME: HARBIN DONGXING ALUMINUM CO., LTD
ADDRESS: NO.1 TIANFU ROAD, XINHUA INDUSTRIAL AREA, PINGFANG DISTRICT, HARBIN, CHINA 150066

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Name : 5052 ALLOY IN 3MM THICKNESS
SGS Ref. No. : GZIN1603012563PC
Date of Receipt : Mar 30, 2016
Testing Start Date : Mar 30, 2016
Testing End Date : Apr 05, 2016
Test result(s) : For further details, please refer to the following page(s)

Signed for
SGS-CSTC Standards Technical
Services Co., Ltd. QZ Branch Testing
Center

Shining Chan
Authorized signatory



TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 2 of 2

Tensile Test:


Test Method: ASTM B209-14 & ASTM A370-15

Test item	Specimen type	Tensile strength, S_u (ksi)	Yield strength, $YS(0.2\% \text{ offset})$ (ksi)	Elongation after fracture, $G-2in.$ (%)	Con.
ASTM B209-14 5052 H32 Req.	-	31.0-38.0 (0.114-1.1% 0.249)	≥ 23.0 (0.114-1.1% 0.249)	≥ 9 (0.114-1.1% 0.249)	-
Result	Rectangular specimen	31.6	23.3	14	Pass

Note: 1.1 is sample thickness, in.

2. The results comply with the requirement of ASTM B209-14 type 5052 H32.

Original Sample Photo:



***** End of report*****



This document is issued by the Company subject to its General Conditions of Service printed on request. It is subject to the conditions of the International Standards Organization (ISO) and the International Union of Pure and Applied Chemistry (IUPAC). The results are based on the information provided by the client and the results of the tests performed. The results are not valid for other purposes than those for which they were intended. The results are not valid for other purposes than those for which they were intended. The results are not valid for other purposes than those for which they were intended.



This document is issued by the Company subject to its General Conditions of Service printed on request. It is subject to the conditions of the International Standards Organization (ISO) and the International Union of Pure and Applied Chemistry (IUPAC). The results are based on the information provided by the client and the results of the tests performed. The results are not valid for other purposes than those for which they were intended. The results are not valid for other purposes than those for which they were intended. The results are not valid for other purposes than those for which they were intended.



Contact nous

Nous avons une équipe commerciale et technique efficace pour fournir aux clients un support technique complet. Dans les mises à niveau de produits, mises à jour techniques et les clients à faire des progrès ensemble pour fournir aux clients des applications d'alliage d'aluminium sur la solution.

Contact Us



Amber Zheng

- Position: Sales Manager
- Tel: 0086-0451-87105377 0086-13766825059
- Email: amber@aludongxing.com
- SKYPE: [amberamber796](https://www.skype.com/people/amberamber796)
- Trademanager: [cnaludongxing](https://www.trademanager.com/cnaludongxing)
- QQ: 2851851713