



□□ & □□

MOQ	300
-----	-----

□□□□

□ □ □ □ □ □ □ □ □ □ □ □ □ □


Dongxing 2000



□ □ □ □





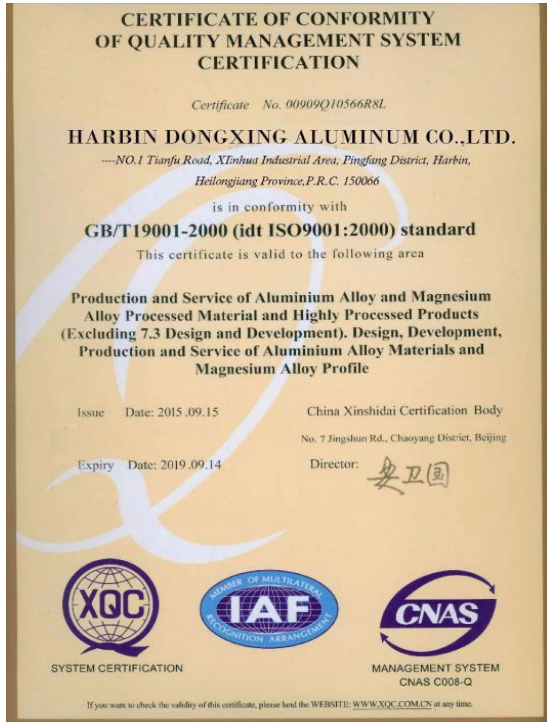

TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 1 of 2

CUSTOMER NAME: HARBIN DONGXING ALUMINUM CO., LTD
ADDRESS: NO.1 TIANFU ROAD, XINHUA INDUSTRIAL AREA, PINGFANG
DISTRICT, HARBIN, CHINA 150066

The following sample(s) was/ were submitted and identified on behalf of the client as:

Sample Name : 5052 ALLOY IN 3MM THICKNESS
SGS Ref. No. : GZIN1603012563PC

Date of Receipt : Mar 30, 2016

Testing Start Date : Mar 30, 2016

Testing End Date : Apr 05, 2016

Test result(s) : For further details, please refer to the following page(s)

Signed for
SGS-CSTC Standards Technical
Services Co., Ltd. GZ Branch Testing
Center

Shining Chan
Authorized signatory



This document is issued by the Singapore Agency for the General Council of Science printed material, available for request or acquisition. It may be used for personal or commercial purposes, but not for reproduction, distribution, or other forms of copying, without the prior written permission of the Singapore Agency for the General Council of Science. This document is issued by the Singapore Agency for the General Council of Science printed material, available for request or acquisition. It may be used for personal or commercial purposes, but not for reproduction, distribution, or other forms of copying, without the prior written permission of the Singapore Agency for the General Council of Science.

此文件由新加坡總科學館印發，可供索取或購買。此文件可供個人或商業用途，但不得未經新加坡總科學館印發處事先書面許可而作任何形式之複製、分發或其他用途。此文件由新加坡總科學館印發，可供索取或購買。此文件可供個人或商業用途，但不得未經新加坡總科學館印發處事先書面許可而作任何形式之複製、分發或其他用途。

中國·廣州·經濟技術開發區科學城科匯路168號 郵政 510663 020-25127580 020-25127581 www.sgsgroup.com.cn
 中國·廣州·經濟技術開發區科學城科匯路168號 郵政 510663 020-25127580 020-25127581 www.sgsgroup.com.cn

Member of the SGS Group (SGS Ltd)



TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 2 of 2

Tensile Test:


Test Method: ASTM B209-14 & ASTM A370-15

Test item	Specimen type	Tensile strength, S _t (ksi)	Yield strength, YS(0.2% offset) (ksi)	Elongation after fracture, G=2in. (%)	Con.
ASTM B209-14 5052 H32 Req.	-	31.0-38.0 (0.114≤0.249)	≥23.0 (0.114≤0.249)	≥9 (0.114≤0.249)	-
Result	Rectangular specimen	31.6	23.3	14	Pass

Note: 1. t is sample thickness, in.

2. The results comply with the requirement of ASTM B209-14 type 5052 H32

Original Sample Photo:



***** End of report*****



This document is issued by the Copyright Society to its General Collection of Services printed, published, or otherwise made available at <http://www.copyright.com/terms-and-conditions.aspx>, or for electronic format documents, submitted to Terms and Conditions for Electronic Distribution at <http://www.copyright.com/terms-and-conditions.aspx>. This document is not intended to constitute a contract, and its use is limited to the information contained therein. The information contained herein is provided for informational purposes only and is not intended to constitute a contract. The information contained herein is provided for informational purposes only and is not intended to constitute a contract. The information contained herein is provided for informational purposes only and is not intended to constitute a contract.



Contact Us



Amber Zheng

- Position: Sales Manager
- Tel: 0086-0451-87105377 0086-13766825059
- Email: amber@aludongxing.com
- SKYPE: [amberamber796](#)
- Trademanager: [cnaludongxing](#)
- QQ: 2851851713