

1060 1060

1060

1060	1060 1060 1060
1060	1060
1060	1060
1060	1.0-8.0 mm
1060	120-650 mm
1060	1060 1060, 1060, 1060, 1060, 1060 1060, 1060, 1060, 1060 1060 1060 1060 1060 1060.
MOQ	5 1060
1060	GB / T 3880-2006, Q / Q 141-2004, ASTM, JIS, EN
1060	ISO9001, SGS, ROHS, FDA, TUV



1060



□□ □□

□□ □□□□


□□□ **Dongxing** □□□□ □□ □□

□□ □□ □□□□□ □□□ Dongxing □□□□ □□ □□, □□□□ □□□ □□□ □ □□□ □□ □□□□□. □□□□ □□□□ □□ □□□ □□□□ □□□□ □□□□ □□□□. □□ □□□ □□ □ □□ □□□□ □□, □□, □□ □ □□□ □□ □□□□ □□□□ □□□□ □□ □□□□□.



□□ □□



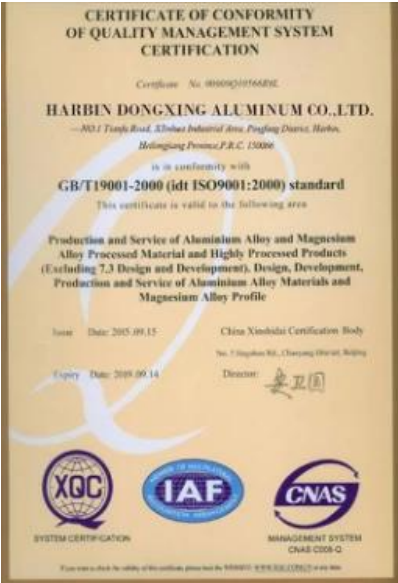

0000 0000 0000 0 00 0000 00000 00 0 00 000000. 00 000000, 00 00000 0 0000 00 00000 00000 0000 0 00 00 000000 00000 000000.

Contact Us



Amber Zheng

- Position: Sales Manager
- Tel: 0086-0451-87105377 0086-13766825059
- Email: amber@aludongxing.com
- SKYPE: [amberamber796](#)
- Trademanager: [cnaludongxing](#)
- QQ: 2851851713