

Product Description

Specification

Product Name	1050 aluminum circle
Alloy	1050
Temper	O
Thickness	1.0-8.0 mm
ID	120-650 mm
Surface	Be free from Oil Stain, Dent, Inclusion, Scratches, Stain, Oxide Discoloration, Breaks, Corrosion, Roll Marks, Dirt Streaks and other defect which will interfere with use.
MOQ	5 tons
Standard	GB/T 3880-2006, Q/Q 141-2004, ASTM, JIS, EN
Certification	ISO9001,SGS, ROHS,FDA,TUV



Application



Cookware.

Hard Anodizing, Polishing, Enameling, Non-stick cookware, Pressure cooker, rice cookers, Fat Fryers, Pans, Pots.

Aluminum Circle is widely used in electronics, daily chemicals, medicine, culture and education and auto parts. Electrical, insulation, machinery manufacturing, automotive, aerospace, military, mold, construction, printing and other industries.

Packing & Delivery

MOQ	5 tons
Produce Capacity	2500 tons/Month
Sample Charge	A4 paper size sample for free,you only need to pay the freight
Sample Making	About one week after we get the charges
Payment Item	T/T,30% prepayment,balance before shipment. Irrevocable L/C at sight
Delivery Time	About 30 days after receiving the prepayment
Packaging Details	Standard export package. Wooden cases. One 20 GP container can load about 18 tons One 40 GP container can load about 22 tons



About us

Company Profile

Harbin Dongxing Aluminum Co.,Ltd

Welcome to Harbin Dongxing Aluminum Co.,Ltd,a leading Chinese manufacturer of aluminum products.We are established in the year 2000, located at beautiful city Harbin. Our factory is a competent and reliable supplier in plain and coated aluminum foil, coil, sheet, and other aluminum products in China.





Processing Equipment





Our Certifications

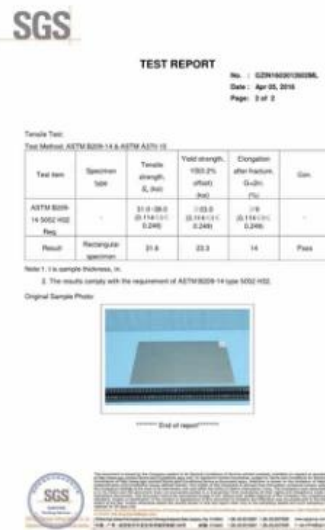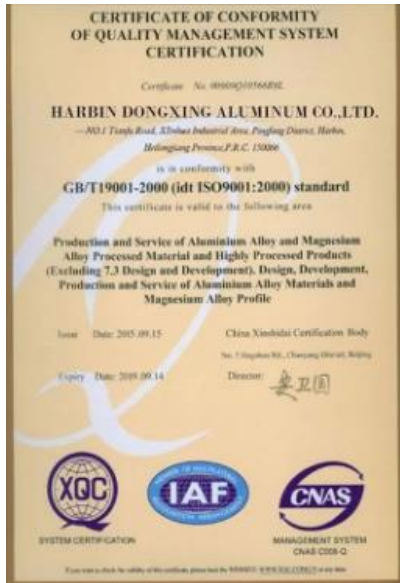

Contact us

We have an efficient sales and technical team to provide customers with comprehensive technical support. In product upgrades, technical updates and customers to make progress together to provide customers with aluminum alloy applications on the solution.

