Product Description

Specification


Product Name	Aluminum PE coated coil manufacturer china				
Material	1000/3000/5000 Series				
Temper	H114				
Thickness	0.8-10 mm				
Width	100-2400 mm				
Length	less than 12000 mm				
Surface	Be free from Oil Stain, Dent, Inclusion, Scratches, Stain, Oxide Discoloration, Breaks, Corrosion, Roll Marks, Dirt Streaks and other defect which will interfere with use.				
MOQ	5 tons				
Standard	GB/T 3880-2006, Q/Q 141-2004, ASTM, JIS, EN				
Certification	ISO9001,SGS, ROHS,FDA,TUV				

Products Show





Application

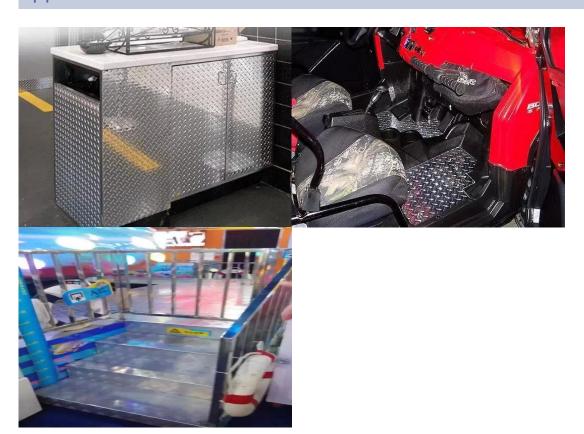

5 bars diamond Aluminum checkered coil are widely used in lighting, solar reflective film, the appearance of the building, interior decoration, ceiling, wall, furniture, cabinets, elevator, car inner decoration, household appliances, refrigerators, microwave ovens, audio equipment, aerospace, military, chemical / thermal insulation pipeline coating.

Packing & Delivery

MOQ	3 tons
Produce Capacity	2500 tons/Month
Sample Charge	A4 paper size sample for free,you only need to pay the freight
Sample Making	About one week after we get the charges
Payment Item	T/T,30% prepayment,balance before shipment. Irrevocable L/C at sight
Delivery Time	25-35 days after receiving the prepayment
Packaging Details	Standard export package. Horizontal and vertical pallet. One 20 GP container can load about 18 tons One 40 GP container can load about 22 tons





Company Profile

Harbin Dongxing Aluminum Co.,Ltd

Welcome to Harbin Dongxing Aluminum Co.,Ltd,a leading Chinese manufacturer of aluminum products.We are established in the year 2000, located at beautiful city Harbin. Our factory is a competent and reliable supplier in plain and coated aluminum foil, coil, sheet, and other aluminum products in China.



Processing Equipment





Our Certifications



Certificate No. 00909Q10566R8L

HARBIN DONGXING ALUMINUM CO.,LTD.

-NO.1 Tianfu Road, XI:nhua Industrial Area, Pingfang District, Harbin, Heilongjiang Province, P.R.C. 150066

is in conformity with

GB/T19001-2000 (idt ISO9001:2000) standard

This certificate is valid to the following area

Production and Service of Aluminium Alloy and Magnesium Alloy Processed Material and Highly Processed Products (Excluding 7.3 Design and Development). Design, Development, Production and Service of Aluminium Alloy Materials and Magnesium Alloy Profile

Issue Date: 2015.09.15

China Xinshidai Certification Body

Expiry Date: 2019.09.14

No. 7 Jingshun Rd., Chaoyang District, Beijing













SGS

TEST REPORT

No. : GZIN1603012602ML Date : Apr 05, 2016 Page: 1 of 2

CUSTOMER NAME:

HARBIN DONGXING ALUMINUM CO., LTD NO.1 TIANFU ROAD, XINHUA INDUSTRIAL AREA, PINGFANG DISTRICT, HARBIN, CHINA 150066 ADDRESS:

Signed for SGS-CSTC Standards Technical Services Co., Ltd. GZ Branch Testing Center



SGS

TEST REPORT

No. : GZIN1603012602ML Date : Apr 05, 2016 Page: 2 of 2


Tensile Test:

Test Method: ASTM B209-14 & ASTM A370-15

Test item	Specimen type	Tensile strength, S_{u} (ksi)	Yield strength, YS(0.2% offset) (ksi)	Elongation after fracture, G=2in. (%)	Con.
ASTM B209- 14 5052 H32 Req.	25	31.0~38.0 (0.114≤t≤ 0.249)	≥23.0 (0.114≤t≤ 0.249)	≥9 (0.114≤t≤ 0.249)	89
Result	Rectangular specimen	31.6	23.3	14	Pass

Note:1.1 is sample thickness, in.
2. The results comply with the requirement of ASTM B209-14 type 5052 H32.

Original Sample Photo:



****** End of report***





Contact us

We have an efficient sales and technical team to provide customers with comprehensive technical support. In product upgrades, technical updates and customers to make progress together to provide customers with aluminum alloy applications on the solution.

