Product Description

Specification


Product Name	Aluminum coil for car parts manufacturer
Material	1000/3000/5000 Series
Temper	H114
Thickness	0.8-10 mm
Width	100-2400 mm
Length	less than 12000 mm
Surface	Be free from Oil Stain, Dent, Inclusion, Scratches, Stain, Oxide Discoloration, Breaks, Corrosion, Roll Marks, Dirt Streaks and other defect which will interfere with use.
MOQ	5 tons
Standard	GB/T 3880-2006, Q/Q 141-2004, ASTM, JIS, EN
Certification	ISO9001,SGS, ROHS,FDA,TUV

Products Show





Application

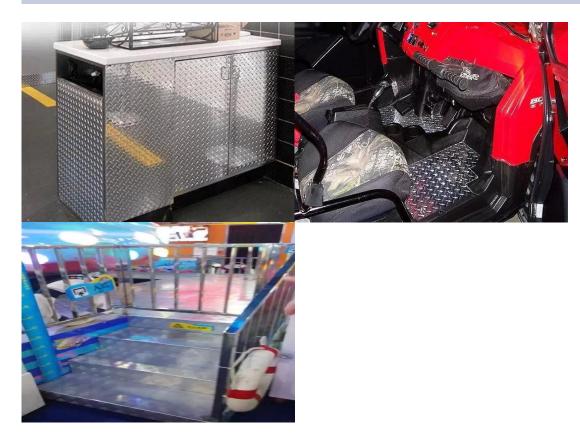

5 bars diamond Aluminum checkered coil are widely used in lighting, solar reflective film, the appearance of the building, interior decoration, ceiling, wall, furniture, cabinets, elevator, car inner decoration, household appliances, refrigerators, microwave ovens, audio equipment, aerospace, military, chemical / thermal insulation pipeline coating.

Packing & Delivery

MOQ	3 tons
Produce	2500 tons/Month
Capacity	
Sample Charge	A4 paper size sample for free, you only need to pay the freight
Sample Making	About one week after we get the charges
Payment Item	T/T,30% prepayment,balance before shipment. Irrevocable L/C at sight
Delivery Time	25-35 days after receiving the prepayment
Packaging Details	Standard export package. Horizontal and vertical pallet. One 20 GP container can load about 18 tons One 40 GP container can load about 22 tons





Company Profile

Harbin Dongxing Aluminum Co.,Ltd

Welcome to Harbin Dongxing Aluminum Co.,Ltd,a leading Chinese manufacturer of aluminum products.We are established in the year 2000, located at beautiful city Harbin. Our factory is a competent and reliable supplier in plain and coated aluminum foil, coil, sheet, and other aluminum products in China.




Processing Equipment





Our Certifications

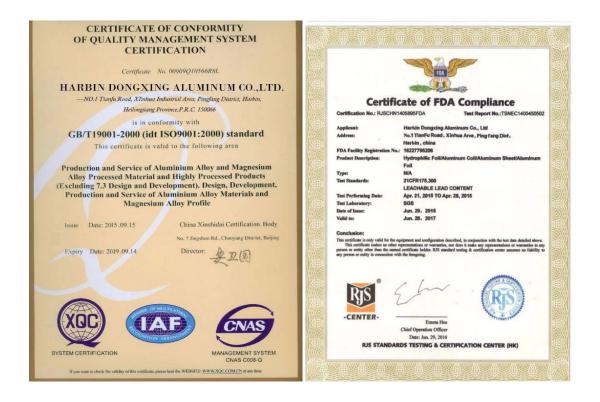



SGS

	TEST REPORT		
	No. : GZIN1603012602ML		
	Date : Apr 05, 2016		
	Page: 1 of 2		
CUSTOMER NAME:	HARBIN DONGXING ALUMINUM CO., LTD		
ADDRESS:	NO.1 TIANFU ROAD, XINHUA INDUSTRIAL AREA, PINGFANG		
	DISTRICT, HARBIN, CHINA 150066		
The following sample(s) was/ were submitted and identified on behall of the client as:		
Sample Name	: 5052 ALLOY IN 3MM THICKNESS		
SGS Ref. No.	: GZIN1603012563PC		
Date of Receipt	: Mar 30, 2016		
Testing Start Date	: Mar 30, 2016		
Testing End Date	: Apr 05, 2016		
Test result(s)	: For further details, please refer to the following page(s)		
Signed for			
SGS-CSTC Standards			
Services Co., Ltd. GZ Center	Branch Testing		
4			
GD			
Shining Chan			
Authorized signatory			



-	-	
1	12	
	. 1	-
0	9	


TEST REPORT		
	No. :	GZIN1603012602ML
	Date :	Apr 05, 2016
	Page:	2 of 2

Tensile Test:

Test item	Specimen type	Tensile strength, S _v (ksi)	Yield strength, YS(0.2% offset) (ksi)	Elongation after fracture, G=2in, (%)	Con.
ASTM B209- 14 5052 H32 Req.	×	31.0~38.0 (0.114≤t≤ 0.249)	≥23.0 (0.114≤t≤ 0.249)	≥9 (0.114≤t≤ 0.249)	
Result	Rectangular	31.6	23.3	14	Pass

 Hesuit
 specimen
 31.0
 23.3
 14

 Note:1. tis sample thickness, in.
 2. The results comply with the requirement of ASTM B209-14 type 5052 H32.
 2.
Original Sample Photo:





Comment Conference Confere



Contact us

We have an efficient sales and technical team to provide customers with comprehensive technical support. In product upgrades, technical updates and customers to make progress together to provide customers with aluminum alloy applications on the solution.

