

Product Description

Specification

Product Name	china aluminum circle company
Alloy	1060
Temper	O
Thickness	1.0-8.0 mm
ID	120-650 mm
Surface	Be free from Oil Stain, Dent, Inclusion, Scratches, Stain, Oxide Discoloration, Breaks, Corrosion, Roll Marks, Dirt Streaks and other defect which will interfere with use.
MOQ	5 tons
Standard	GB/T 3880-2006, Q/Q 141-2004, ASTM, JIS, EN
Certification	ISO9001,SGS, ROHS,FDA,TUV



Application



Cookware.

Hard Anodizing, Polishing, Enameling, Non-stick cookware, Pressure cooker, rice cookers, Fat Fryers, Pans, Pots.

Aluminum Circle is widely used in electronics, daily chemicals, medicine, culture and education and auto parts. Electrical, insulation, machinery manufacturing, automotive, aerospace, military, mold, construction, printing and other industries.

Packing & Delivery

MOQ	5 tons
Produce Capacity	2500 tons/Month
Sample Charge	A4 paper size sample for free,you only need to pay the freight
Sample Making	About one week after we get the charges
Payment Item	T/T,30% prepayment,balance before shipment. Irrevocable L/C at sight
Delivery Time	About 30 days after receiving the prepayment
Packaging Details	Standard export package. Wooden cases. One 20 GP container can load about 18 tons One 40 GP container can load about 22 tons



About us

Company Profile

Harbin Dongxing Aluminum Co.,Ltd

Welcome to Harbin Dongxing Aluminum Co.,Ltd,a leading Chinese manufacturer of aluminum products.We are established in the year 2000, located at beautiful city Harbin. Our factory is a competent and reliable supplier in plain and coated aluminum foil, coil, sheet, and other aluminum products in China.




Processing Equipment





Our Certifications

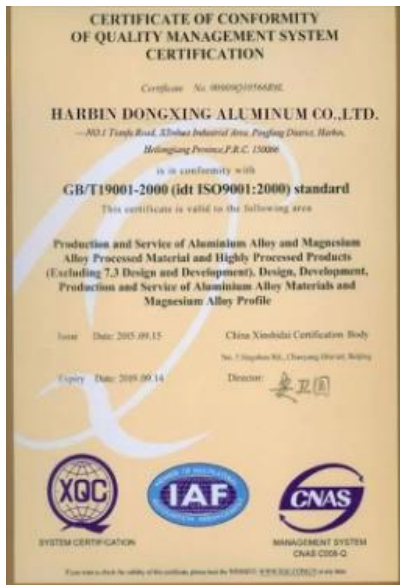

TEST REPORT

No. : QZNI603012602ML
Date : Apr 05, 2016
Page: 1 of 2

CUSTOMER NAME: HARBIN DONGXING ALUMINUM CO., LTD.
ADDRESS: NO.1 TIANFU ROAD, XINHU INDUSTRIAL AREA, PINGFANG DISTRICT, HARBIN, CHINA 150066

The following sample(s) were submitted and identified on behalf of the client as:
Sample Name: 5052 ALLOY IN 3MM THICKNESS
SGS Ref. No.: QZNI603012602ML
Date of Receipt: Mar 30, 2016
Testing Start Date: May 30, 2016
Testing End Date: Apr 05, 2016
Test result(s): For further details, please refer to the following page(s)

Signed for:
SGS-CSTC Standards Technical
Service Co., Ltd. QC Branch Testing
Center
Shirong Chen
Authorized signatory



Member of the SGS Group (2015-2016)



TEST REPORT

No. : QZNI603012602ML
Date : Apr 05, 2016
Page: 2 of 2


Sample Test

Test Item	Specimen Size	Tensile strength, σ_{TS} (MPa)	Yield strength, $\sigma_{0.2}$ (MPa)	Elongation after fracture, A_{50} (%)	Dist.
ASTM B209 14 5052 H32 Plate	114.3 (4.5) 6.35 (0.25)	311 (22.5) (22.5)	241 (17.4) (17.4)	19 (1.4) (1.4)	Pass
Result	Receiving specimen	21.8	22.3	14	Pass

Note 1: 1 is sample thickness, in.

2. The results comply with the requirement of ASTM B209-14 type 3052 H32.

Original Sample Photo



Shop of origin



Member of the SGS Group (2015-2016)



Contact us

We have an efficient sales and technical team to provide customers with comprehensive technical support. In product upgrades, technical updates and customers to make progress together to provide customers with aluminum alloy applications on the solution.

