

produtos


Descrição

Especificação

produtos Nome	Bobina de revestimento de alumínio à venda
Material	Série 1000/3000/5000
Temperamento	H114
Espessura	0,8-10 mm
Largura	100-2400 mm
comprimento	menos de 12000 mm
Superfície	Seja livre de mancha de óleo, dente, inclusão, arranhões, manchas, descoloração de óxido, rupturas, corrosão, marcas de rolo, marcas de sujeira e outros defeitos que interferirão com o uso.
MOQ	5 toneladas
Padrão	GB / T 3880-2006, Q / Q 141-2004, ASTM, JIS, EN
Certificação	ISO9001, SGS, ROHS, FDA, TUV


Produtos

exposição

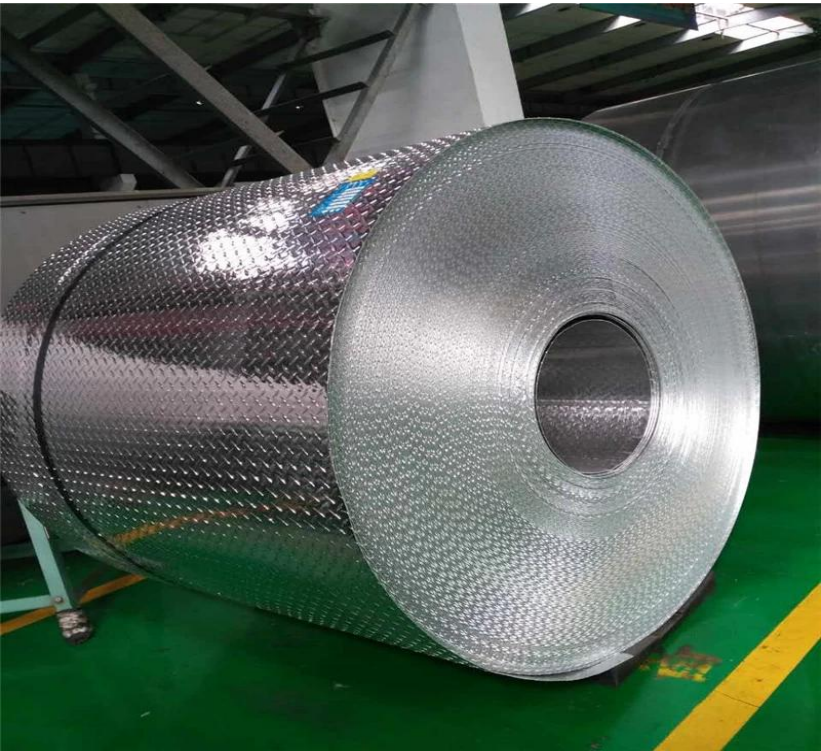



Aplicação

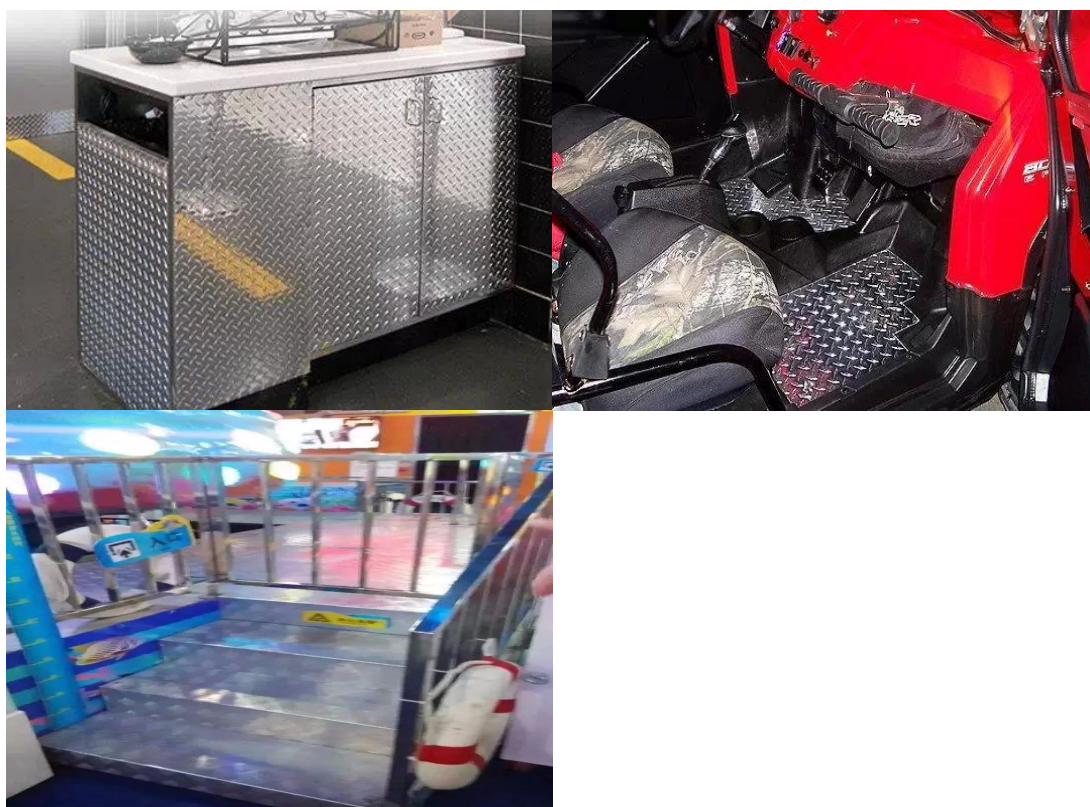

5 barras de diamante A bobina de xadrez de alumínio é amplamente utilizada na iluminação, filme reflexivo solar, aparência do edifício, decoração de interiores, teto, parede, móveis, armários, elevador, decoração interior do carro, eletrodomésticos, frigoríficos, fornos de microondas, equipamentos de áudio, aeroespacial, militar, revestimento de tubulação de isolamento químico / térmico.

Embalagem & Entrega

MOQ	3 toneladas
Produzir Capacidade	2500 toneladas / Mês
Taxa de exemplo	Amostra de tamanho de papel A4 de graça, você só precisa pagar o frete
Fabricação de amostras	Cerca de uma semana depois recebemos os encargos
Item de pagamento	T / T, pré-pagamento de 30%, saldo antes do embarque. L / C irrevogável à vista
Tempo de entrega	25-35 dias após ter recebido o pré-pagamento
Detalhes da embalagem	Pacote de exportação padrão. Paletes horizontais e verticais. Um recipiente de 20 GP pode carregar cerca de 18 toneladas Um recipiente de 40 GP pode carregar cerca de 22 toneladas





Sobre nós

Perfil da companhia

Harbin Dongxing Aluminium Co., Ltd

Bem-vindo ao Harbin Dongxing Aluminium Co., Ltd, um dos principais fabricantes chineses de produtos de alumínio. Estamos estabelecidos no ano 2000, localizado na bela cidade de Harbin. Nossa fábrica é um fornecedor competente e confiável em folha de alumínio liso e revestido, bobina, folha e outros produtos de alumínio na China.




Equipamento de processamento





Nosso Certificações

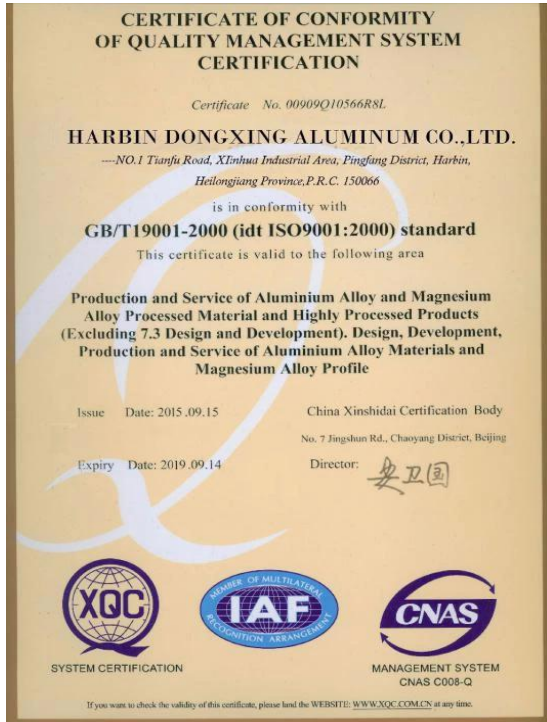

TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 1 of 2

CUSTOMER NAME: HARBIN DONGXING ALUMINUM CO., LTD
ADDRESS: NO.1 TIANFU ROAD, XINHUA INDUSTRIAL AREA, PINGFANG
DISTRICT, HARBIN, CHINA 150066

The following sample(s) was/ were submitted and identified on behalf of the client as:

Sample Name : 5052 ALLOY IN 3MM THICKNESS

SGS Ref. No. : GZIN1603012563PC

Date of Receipt : Mar 30, 2016

Testing Start Date : Mar 30, 2016

Testing End Date : Apr 05, 2016

Test result(s) : For further details, please refer to the following page(s)

Signed for
SGS-CSTC Standards Technical
Services Co., Ltd. GZ Branch Testing
Center

Center
Shining Chan
Authorized signatory



This document is issued by the Company subject to the General Conditions of Service printed overleaf, available on request or accessible on the company's internet Website. Conditions apply to, and restrict, the formal documents, subject to the terms and conditions for the use of the documents. Documents are issued by the Company under Terms and Conditions Terms—Document are Issued. Attention is drawn to the limitation of liability, the Company's findings at the time of its intervention only and within the limits of its instructions, if any. The Company's sole responsibility is to provide the information requested by the Client. The Client is responsible for the use of the information and for the consequences of its use. This document cannot be reproduced except in full, without prior written permission of the Company. Any unauthorized reproduction or use of the information contained in this document is strictly prohibited. The Company is not responsible for the content of any third party's use of the law. Unless otherwise stated the results shown in this last report only refer to the sample(s) tested and such sample(s) are not representative of the whole.

Please do not destroy the authenticity of testing. Inspection report + certificate, please contact us at telephone: 020-87532142, Email: china@sgs.com.cn

Which has, issued for Client's use and is subject to the General Conditions of Service. Site: 010063 1 096-202-0272000 www.sgs.com.cn
中国·广州·经济技术开发区科学城科丰路100号 邮编: 510663 1 096-202-0272000 www.sgs.com.cn



TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 2 of 2

Tensile Test:

Test Method: ASTM B209-14 & ASTM A370-15

Test method: ASTM B209-14 & ASTM A370-15					
Test item	Specimen type	Tensile strength, S _t (ksi)	Yield strength, YS(0.2% offset) (ksi)	Elongation after fracture, G _{2in} (%)	Con.
ASTM B209-14 5052 H32 Req.	-	31.0-38.0 (0.114<= <= 0.249)	>=23.0 (0.114<= <= 0.249)	>=9 (0.114<= <= 0.249)	-
Result	Rectangular noncylindrical	31.6	23.3	14	Pass

Note: 1. t is sample thickness, in.

2. The results comply with the requirement of ASTM B209-14 type 5052 H32

Original Sample Photo:



***** End of report*****

[illegible]

Contato nos

Temos uma eficiente equipe de vendas e técnica para fornecer aos clientes suporte técnico abrangente. Nas atualizações de produtos, atualizações técnicas e clientes para avançar juntos para oferecer aos clientes aplicações de liga de alumínio na solução.

Contact Us



Amber Zheng

- Position: Sales Manager
- Tel: 0086-0451-87105377 0086-13766825059
- Email: amber@aludongxing.com
- SKYPE: [amberamber796](#)
- Trademanager: [cnaludongxing](#)
- QQ: 2851851713