

Ürün Açıklama

Şartname


Ürün isim	Alüminyum rulo üreticisi çin
Malzeme	1000/3000/5000 Serisi
öfke	H114
Kalınlık	0.8-10 mm
Genişlik	100-2400 mm
uzunluk	12000 mm'den daha az
Yüzey	Yağlı Boya, Dent, Kapsama, Çizikler, Leke, Oksit Renk Değişimi, Kırılmalar, Korozyon, Rulo İşaretleri, Kir Çizgileri ve kullanıma müdahale edecek diğer kusurlardan uzak durun.
Adedi	5 ton
Standart	GB / T 3880-2006, Q / Q 141-2004, ASTM, JIS, EN
belgeleme	ISO9001, SGS, RoHS, FDA, TÜV

Ürünler Göstermek





Uygulama

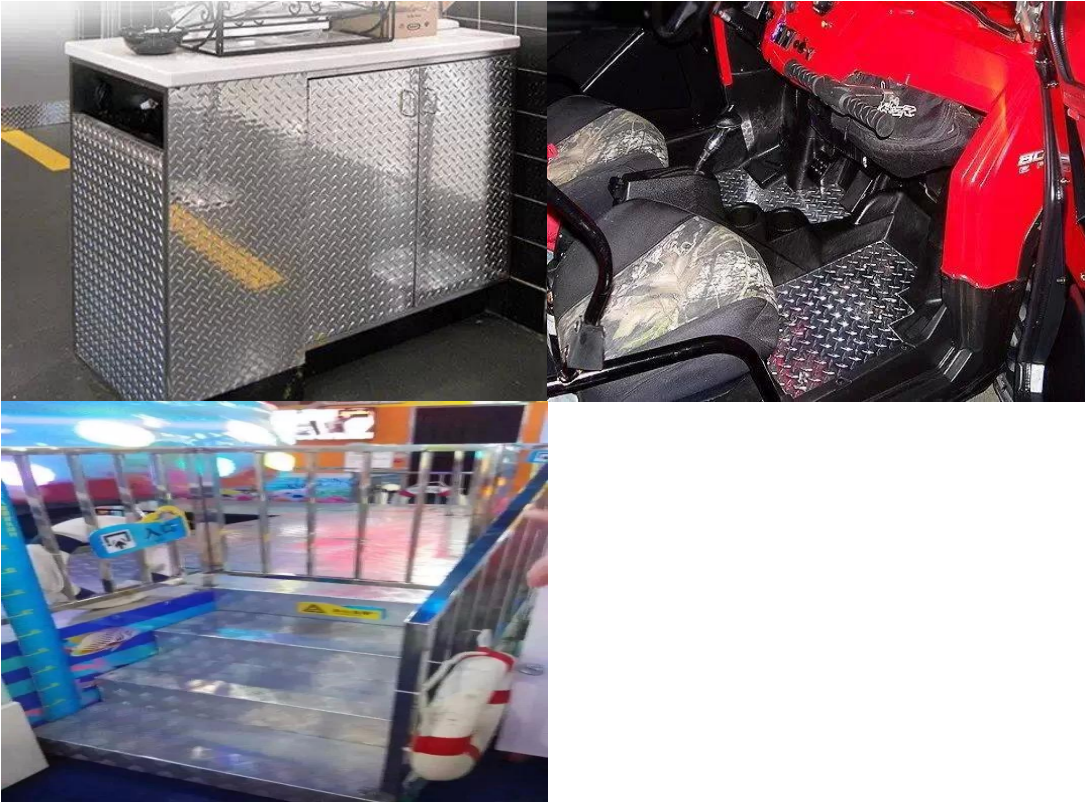

5 bar elmas Alüminyum damalı bobin yaygın aydınlatma, güneş yansıtıcı film, binanın görünümü, iç dekorasyon, tavan, duvar, mobilya, dolaplar, asansör, araba iç dekorasyon, ev aletleri, buzdolabı, mikrodalga fırın, ses ekipmanları, havacılık, askeri, kimyasal / termik izolasyon boru hattı kaplaması.

Paketleme & Sons; teslim

Adedi	3 ton
Kapasite Üret	2500 ton / Ay
Örnek Ücretlendirme	A4 kağıt boyutu örneği ücretsiz, yalnızca navlun ödemeniz gerekiyor
Örnek Yapma	Masrafları aldıktan yaklaşık bir hafta sonra
Ödeme Ögesi	T / T,% 30 ön ödeme, sevkiyat öncesi bakiye. Geri çevrilemez L / C görüşte
Teslimat süresi	Ön ödemeyi aldıktan sonra 25-35 gün
paketleme Detayları	Standart ihracat paketi. Yatay ve dikey palet. Bir 20 GP konteynır yaklaşık 18 ton yükleyebilir Bir adet 40 GP'lik bir konteyner yaklaşık 22 ton yükleyebilir



şirket Profili

Harbin Dongxing Alüminyum A.Ş., Ltd

Hoşgeldiniz Harbin Dongxing Alüminyum Ltd, alüminyum products.We önde gelen Çinli üretici 2000 yılında, güzel şehir Harbin bulunan kurulmuştur. Fabrikamız, düz ve kaplamalı alüminyum folyo, rulo, sac ve Çin'deki diğer alüminyum ürünler konusunda yetkili ve güvenilir bir tedarikçidir.




İşleme Ekipmanları





bizim Sertifikalar

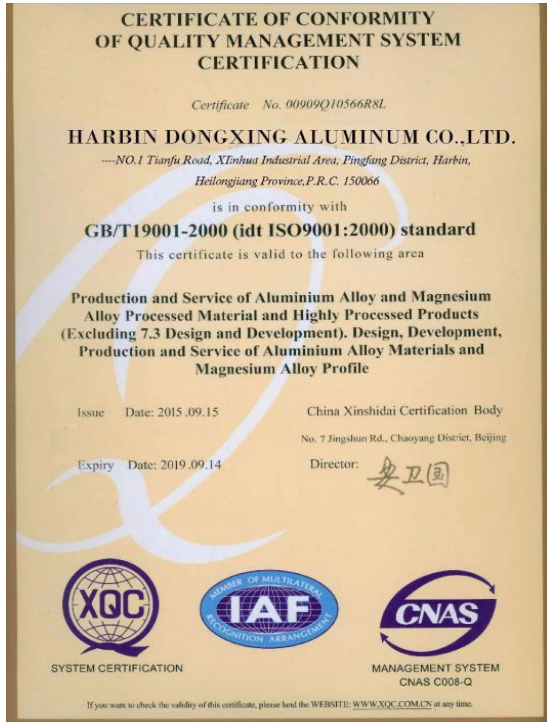



TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 1 of 2

CUSTOMER NAME: HARBIN DONGXING ALUMINUM CO., LTD
ADDRESS: NO.1 TIANFU ROAD, XINHUA INDUSTRIAL AREA, PINGFANG DISTRICT, HARBIN, CHINA 150066

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Name : 5052 ALLOY IN 3MM THICKNESS
SGS Ref. No. : GZIN1603012563PC
Date of Receipt : Mar 30, 2016
Testing Start Date : Mar 30, 2016
Testing End Date : Apr 05, 2016
Test result(s) : For further details, please refer to the following page(s)

Signed for
SGS-CSTC Standards Technical
Services Co., Ltd. GZ Branch Testing
Center

Shining Chan
Authorized signatory



TEST REPORT

No. : GZIN1603012602ML
Date : Apr 05, 2016
Page: 2 of 2

Tensile Test:


Test Method: ASTM B209-14 & ASTM A370-15

Test item	Specimen type	Tensile strength, S_u (ksi)	Yield strength, YS(0.2% offset) (ksi)	Elongation after fracture, G-2in. (%)	Con.
ASTM B209-14 5052 H32 Req.	-	31.0-38.0 (0.114-1.1% 0.249)	≥ 23.0 (0.114-1.1% 0.249)	≥ 9 (0.114-1.1% 0.249)	-
Result	Rectangular specimen	31.6	23.3	14	Pass

Note: 1.1 is sample thickness, in.

2. The results comply with the requirement of ASTM B209-14 type 5052 H32.

Original Sample Photo:



***** End of report*****



This document is issued by the Company subject to its General Conditions of Service printed on request. It is not valid for use as evidence of compliance with any standard or specification unless it is accompanied by the relevant certificate of compliance. The Company is not responsible for the accuracy of the information provided by the client. The Company is not responsible for the accuracy of the information provided by the client. The Company is not responsible for the accuracy of the information provided by the client.



This document is issued by the Company subject to its General Conditions of Service printed on request. It is not valid for use as evidence of compliance with any standard or specification unless it is accompanied by the relevant certificate of compliance. The Company is not responsible for the accuracy of the information provided by the client. The Company is not responsible for the accuracy of the information provided by the client. The Company is not responsible for the accuracy of the information provided by the client.



Temas bize

Müşterilere kapsamlı teknik destek sağlamak için etkin bir satış ve teknik ekibimiz var. Ürün güncellemelerinde, teknik güncellemelerde ve müşterilerin birlikte çözümler üzerinde alüminyum alaşım uygulamaları ile müşterilerine sunmak için ilerleme kaydetmek.

Contact Us



Amber Zheng

- Position: Sales Manager
- Tel: 0086-0451-87105377 0086-13766825059
- Email: amber@aludongxing.com
- SKYPE: [amberamber796](#)
- Trademanager: [cnaludongxing](#)
- QQ: 2851851713